

GUIDELINES FOR PROFESSIONAL SERVICES

DIVISION 10 – SPECIALTIES

The following items are to be included on the drawings and in the specifications by the Design Professional:


I. GENERAL

- A. Toilet compartments shall be floor mounted with rigid overhead aluminum bracing. Doors and dividers shall be a solid plastic material. Shoes at floor and all hardware shall be non-ferrous. All partitions shall have a Santana Black Paisley Finish.
- B. Chalkboards, markerboards, and tackboards shall be anchored with tamper-proof fasteners, and shall not be attached with adhesive. Board materials shall comply with the following:
 - 1. Chalkboards and markerboards
 - a. Face Sheet: 0.024-inch enameling grade steel especially processed for temperatures used in coating porcelain on steel. Coat exposed face and edges with a 3-coat process consisting of primer, ground coat, and color cover coat. Coat concealed face with a 2-coat process consisting of primer and ground coat. Fuse cover and ground coats to steel at manufacturer's standard firing temperatures, but not less than 1200 deg F.
 - b. Core: 3/8-inch thick particleboard core material complying with requirements of ANSI A208.1, Grade 1-M-1.
 - c. Backing Sheet: 0.005-inch thick aluminum sheet backing.
 - d. Laminating Adhesive: Manufacturer's standard moisture resistant thermoplastic-type adhesive.
 - 2. Vinyl-Fabric-Faced Tackboards
 - a. Fabric: Mildew resistant washable vinyl fabric complying with FS CCC-W-408 Type II, weighing not less than 13 oz per sq. yd, laminated to 1/4-inch thick cork sheet. Provide fabric with a flame spread rating of 25 or less when tested according to ASTM E 84. Provide color and texture as scheduled or as selected from manufacturer's standards.

- b. Backing: Factory laminate cork face sheet under pressure to 1/2-inch thick fiberboard backing.
- C. Mirrors – Shall be stainless steel and not located over lavatories in student toilet rooms.
- D. Hand dryers shall be provided in group toilet rooms and shall be the Excel Dryer Xlerotor Model X:-C.
- E. All lockers, except wall hung type, shall be mounted on concrete base 4” to 8” high with two (2) treated wood sleepers. Where practical, lockers shall be recessed, flush with wall. Student lockers shall be “heavy duty”.
- F. The Design Professional shall prepare a full-size sketch of metal plaque for approval prior to preparation of drawing or rubbing by manufacturer. All letters and spacing shall be per the attached drawing. School Board Policy #8.55, Designation of School Facilities. Complete policy is available on the Sarasota County School Board web site—www.sarasota.k12.fl.us.

II. SIGNAGE

- A. This section does not provide guidance for all the possible signs required for all projects. The intent is to standardize certain type of signs.
 - 1. Where evacuation maps are required at exit doors, they shall be 11” x 8 ½” sub-surface printed laminated to back of 1/8” Rowmark Ultr-Matte Clear, beveled edges, no screw holes. The art-work for the evacuation route shall be furnished by the Design Professional.
 - 2. Classroom and office room signage shall be 7 ¾” x 5 ¾” with a 1 ½” high window pocket open on both sides to allow for teacher/staff name. 1st surface shall be 1/16” clear acrylic laminated with 3M 468 MP clear adhesive.
 - 3. Elementary schools and administrative facilities shall have engraved and applied type tactile text. Middle and high schools shall have vandal resistant fused and embedded type tactile text.

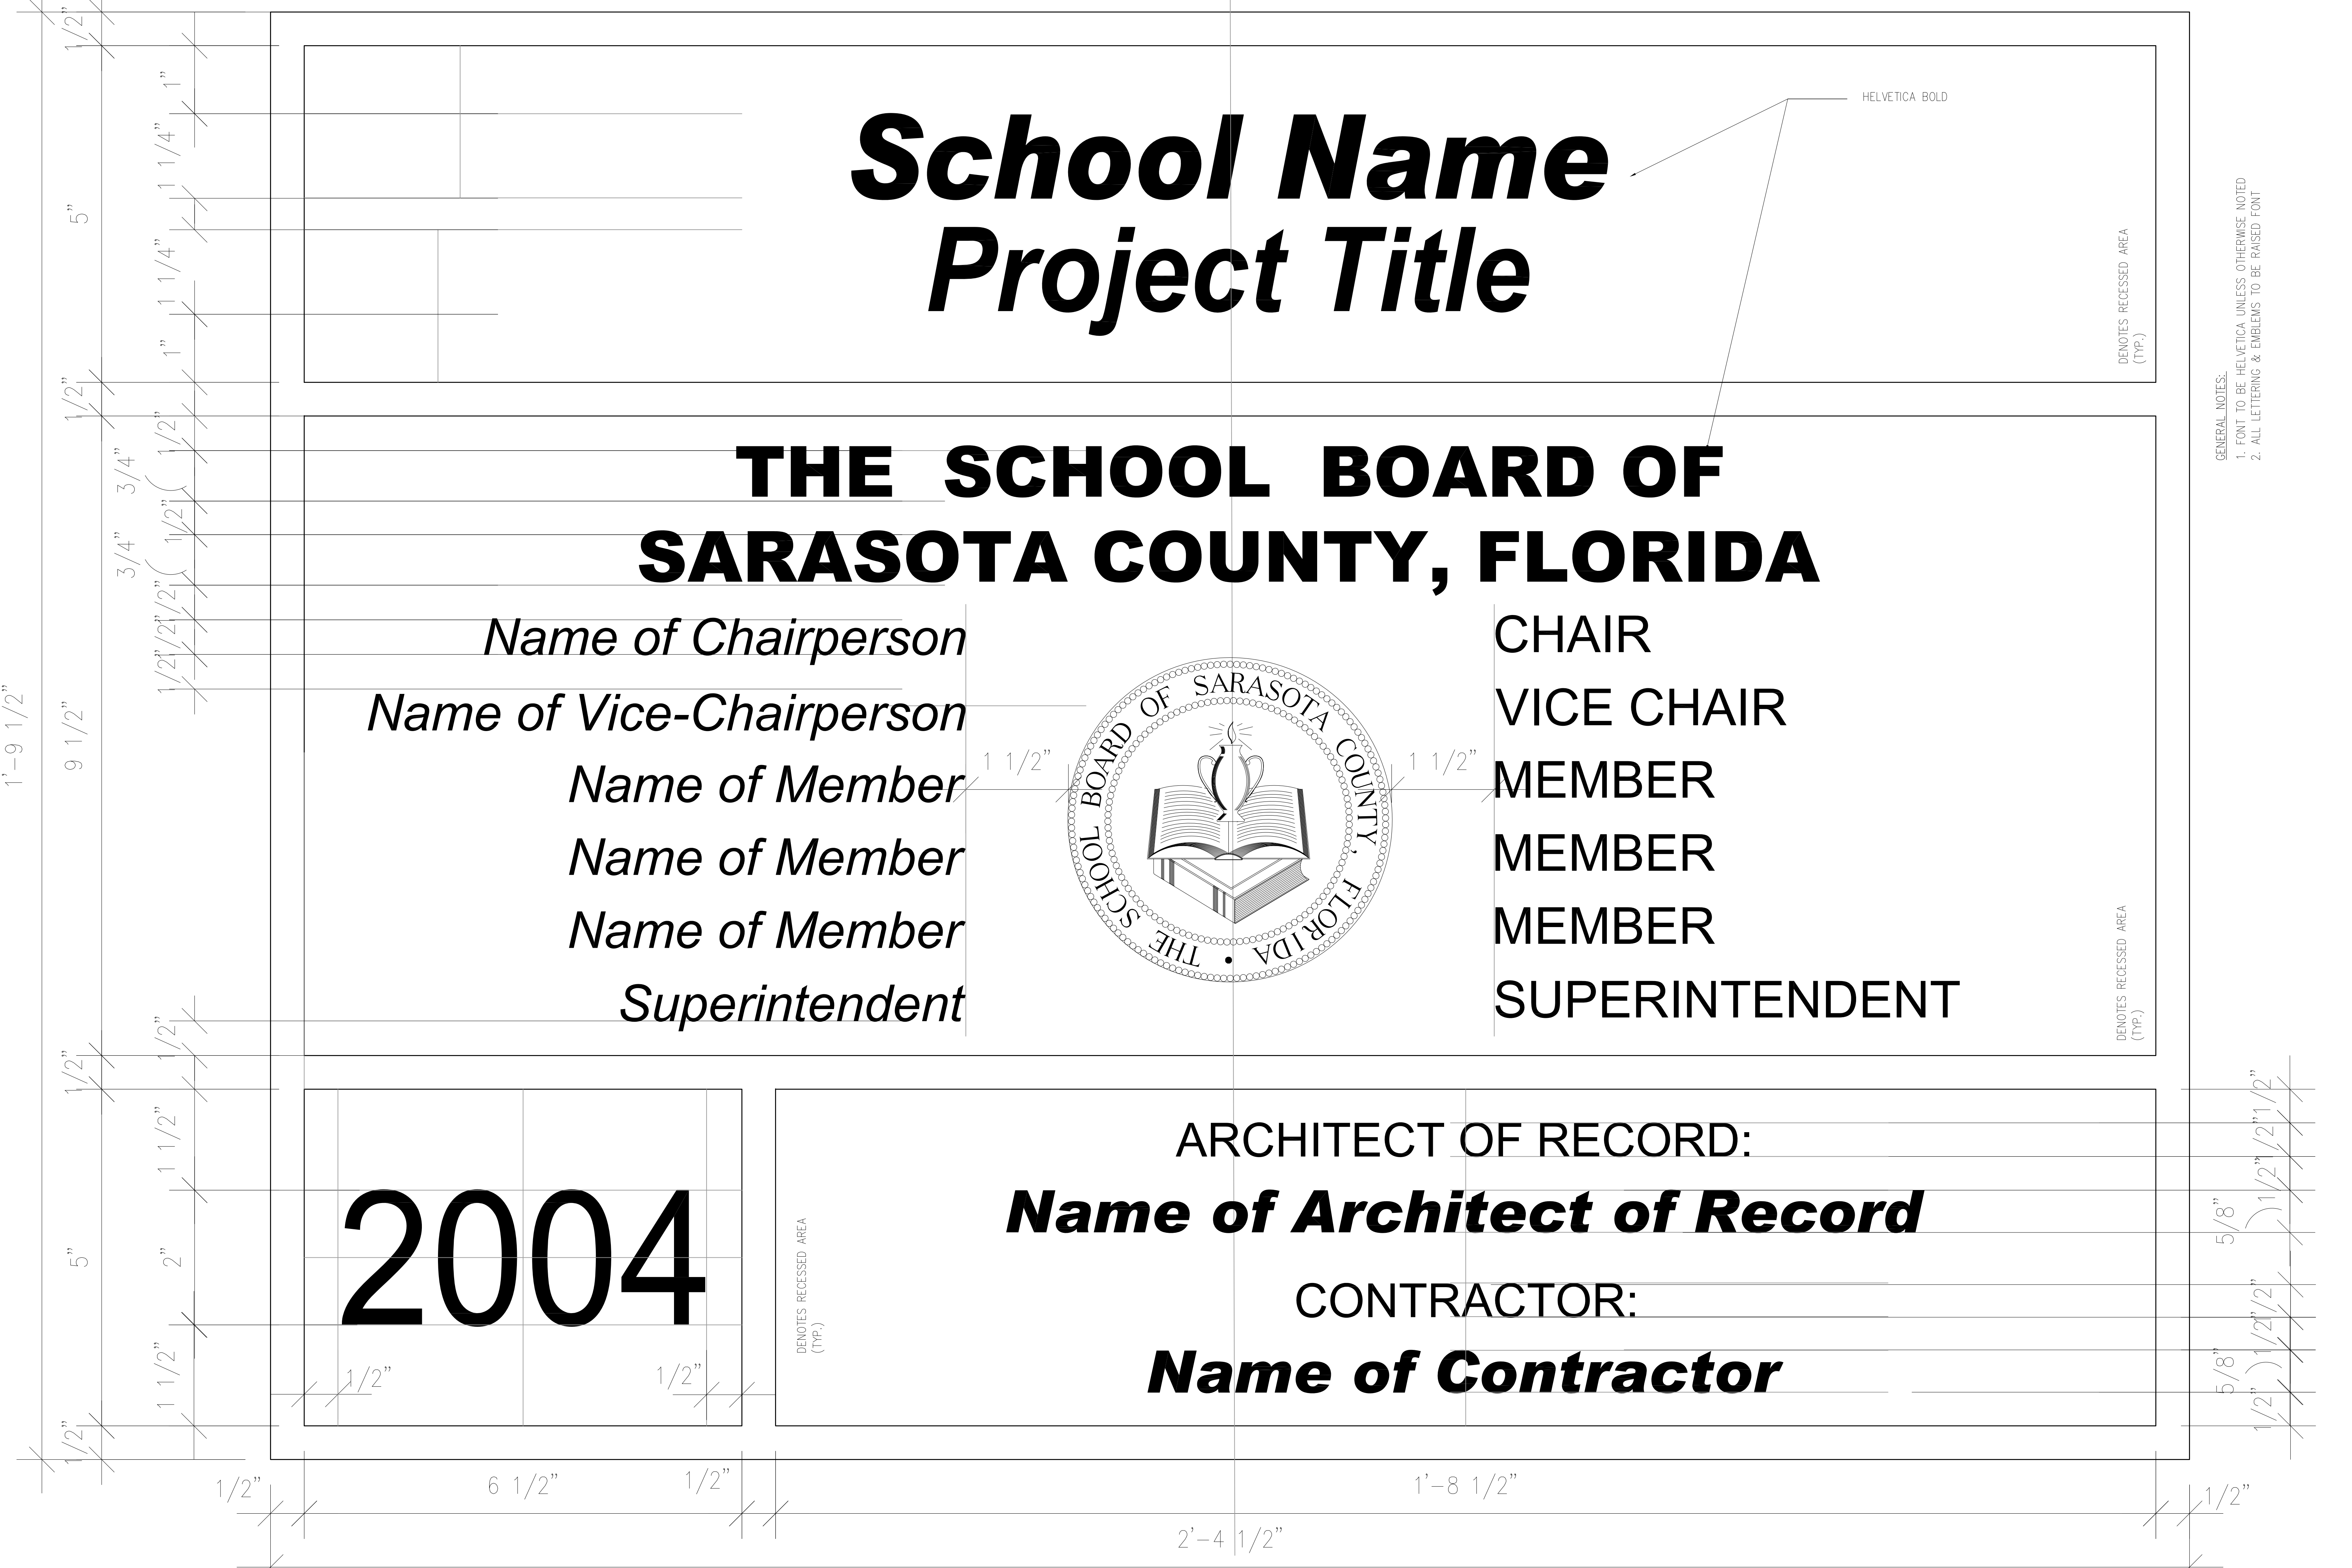

School Name
Project Title

HELVETICA BOLD

DENOTES RECESSED AREA
(TYP.)

**THE SCHOOL BOARD OF
SARASOTA COUNTY, FLORIDA**

Name of Chairperson

CHAIR

Name of Vice-Chairperson

VICE CHAIR

Name of Member

MEMBER

Name of Member


MEMBER

Name of Member

MEMBER

Superintendent

SUPERINTENDENT

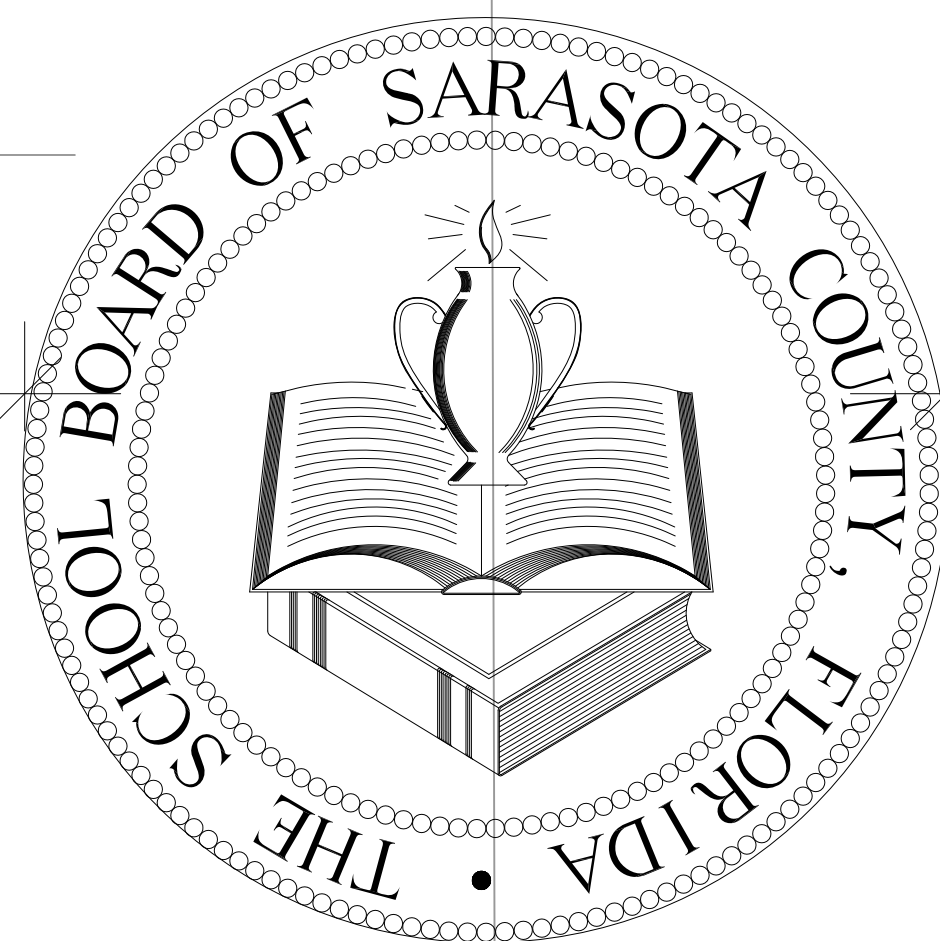

DENOTES RECESSED AREA
(TYP.)

2004

DENOTES RECESSED AREA
(TYP.)

ARCHITECT OF RECORD:
Name of Architect of Record

CONTRACTOR:
Name of Contractor

GENERAL NOTES:
1. FONT TO BE HELVETICA UNLESS OTHERWISE NOTED
2. ALL LETTERING & EMBLEMS TO BE RAISED FONT